



TEST REPORT

IEC TR 62778

Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires

Report reference No RSZ171228550-03

Compiled by (+ signature) Test Engineer: Youyou Huang You for Murry

Approved by (+ signature) Team Leader: Harrison Huang

Date of issue 2018-01-03

Address No.69, Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan,

Guangdong, China.

Testing location Same as above

Applicant Hongli Zhihui Group Co.,Ltd.

China

Standard IEC TR 62778:2014

Test sample(s) received...... 2018-01-02

Test in period...... 2018-01-03

Procedure deviation N.A.

Non-standard test method N.A.

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

LED package Type of test object:

Trademark: N.A.

Model/type reference HL-AM-2835HW-S1-08-HR3

Manufacturer...... Hongli Zhihui Group Co.,Ltd.

No.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou,

China

Rating Input: 2.8-3.4Vdc, 60mA

Copy of marking plate:

None

Test item particulars:



Report No.:RSZ171228550-03

Product evaluated:	⊠ LED package				
	LED module				
	Lamp				
	☐ Luminaire				
Rated voltage (V):	See rating				
Rated current (mA):	See rating				
Rated CCT (K):	See test result				
Rated Luminance (Mcd/m²)::	Not specified				
Component report data used:	⊠ Not applicable				
	☐ LED package				
	☐ LED module				
	☐ Lamp				
	Report number:				
Possible test case verdicts:					
-test case does not apply to the test objectN(.A.)					
-test object does meet the requirementP(ass					
-test object does not meet the requirement:F(ail)					
General remarks:					
The test results presented in this report relate only to the ob-	eject tested.				
This report shall not be reproduced, except in full, without the laboratory.	ne written approval of the Issuing testing				
"(See Enclosure #)" refers to additional information appended to the report.					
"(See appended table)" refers to a table appended to the report.					
Throughout this report a point is used as the decimal separator.					
List of test equipment must be kept on file and available for	review.				
Remark:					
This report consists of 7 pages and following appendixes:					
Appendix A EUT photos					
Annendix R Test equipment list					

General product information:

1. This product is a LED package and manufactured by "Hongli Zhihui Group Co.,Ltd.", Test model is HL-AM-2835HW-S1-08-HR3, rated input 2.8-3.4Vdc, 60mA.



Report No.:RSZ171228550-03


	IEC TR 62778	Report No NOZ 17 1220			
Clause	Requirement + Test	Result - Remark	Verdict		
7	MEASUREMENT INFORMATION FLOW				
7.1	Basic flow				
	'Law of conservation of luminance' applied		Р		
	Use of only true luminance/radiance values		Р		
	In case of luminaire: The light source is operated in the luminaire under similar conditions as when tested as a component		Р		
	In case E _{thr} value for RG2 was established the peak value was derived from angular light distribution		N		
7.2	Conditions for the radiance measurement				
	Standard condition applied (200mm distance, 0,011rad field of view)		Р		
	Non-standard condition applied		N		
7.3	Special cases (I): Replacement by a lamp or LED module of another type				
	Light source is a white light source		N		
	Evaluation done based on highest luminance		N		
	Evaluation done based on CCT value		N		
7.4	Special cases (II): Arrays and clusters of primary light sources				
	LED package is evaluated as:	RG0 unlimited RG1 unlimited RG2 unlimited	N		
	E _{thr} of LED package applies to array		N		
8	RISK GROUP CLASSIFICATION				
	Risk group achieved:		Р		
	Risk Group 0 unlimited		N		
	Risk Group 1 unlimited		Р		
	Risk Group 2 unlimited		N		
	- E _{thr} (lx) : Distance to reach RG1 (m) :	1135 lx 82 mm	Р		




Report No.:RSZ171228550-03

			I	EC TR 62778			
Clause Requirement + Test		Result - Remark		Verdict			
	TABLE: Spe	TABLE: Spectroradiometric measurement					
	Measurement performed on:					_	
	Model numb	er		HL-AM-2835HW-S1-08-HR3	_		
	Test voltage (V): Test current (mA):			2.8-3.4Vdc	_		
				60mA	_		
	Test frequen	cy (Hz).		:	-	_	
	Ambient, t (°C): Measurement distance:				25.5℃	_	
Source size:				☐ Non-small: mm ☐ Small : 0.61 mm	_		
	Field of view	·		:	☐ 100 mrad ☐ 11 mrad ☐ 1,7 mrad (for small sources)	_	
	Item Symb Units Result Remark		Remark				
Correlated temperatu		CCT	K	7241			
x/y colour	coordinates			0.3010/0.3235			
Blue light radiance	hazard	L _B	W/(m ² •sr ¹)	1869			
Blue light irradiance		E _B	W/m ²	0.1684			
Luminanc	e	L	cd/m ²	2.122e+006			
Illuminance E Ix		lx	191				
Suppleme	entary information	 n:					
''	•						






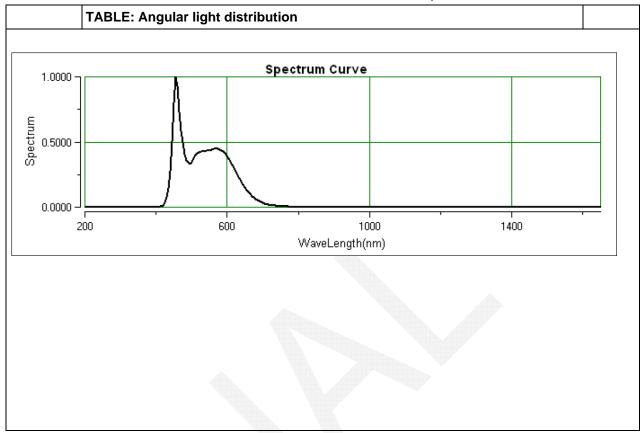




Appendix A - EUT Photos

The Whole view of EUT

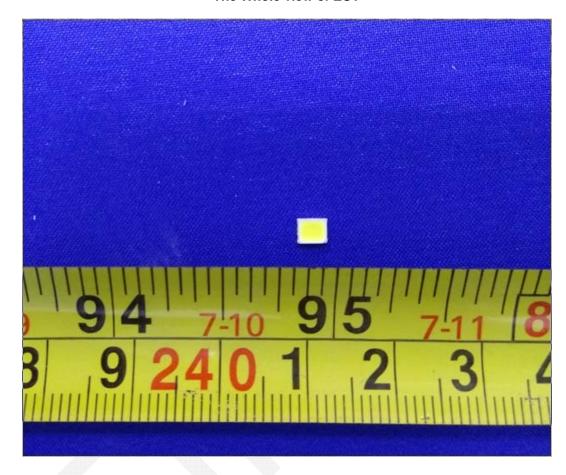





Appendix B Test equipment list

Equipment Description	Model No	BACL#	Manufacturer	Last Cal	Cal Due
UV-VIS-near IR	PMS-2000	T-08-SF213	EVERFINE	2017-08-08	2018-08-07
Spectrophotocolori meter					
Imaging luminance meter	CX-2K	T-08-SF140-1	EVERFINE	2017-08-08	2018-08-07
Radiation illuminance meter	RD-2000	T-08-SF140-2	EVERFINE	2017-08-08	2018-08-07
Radiation illuminance meter	RD-2000	T-08-SF140-3	EVERFINE	2017-08-08	2018-08-07
High Accuracy Array	HAAS-2000	T-08-SF140-4	EVERFINE	2017-08-08	2018-08-07
Hygrothermograph	PWS280	T-08-QA026	N/A	2017-03-21	2018-03-20
Standard power spectral UV radiation-specific	UVS-8003	T-08-EE048	EVERFINE	2017-03-21	2018-03-20
80mm sample integrating sphere	SMS-300	F-08-SF130	EVERFINE	2016-12-26	2018-12-25
Steel tape	HILOCK-19	T-08-SF100	TAJIMA	2013-04-18	2018-04-17
Digital CC&CV DC Power Supply	WY305	T-08-EE098	EVERFINE	2017-03-04	2018-03-04

^{***} End of report ***