



Report No.: SZ2220829-39247E-SF

#### **TEST REPORT**

### **IEC TR 62778**

# Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires

Report reference No ...... SZ2220829-39247E-SF

Compiled by (+ signature) ...... Engineer: Vic Zhang

Approved by (+ signature) ...... Team Leader: Harrison Huang

Date of issue ...... 2022-09-07

Testing laboratory ...... Bay Area Compliance Laboratories Corp.(Dongguan)

Address ....::

No.12, Pulong East 1st Road, Tangxia Town, Dongguan, China

Testing location ...... Same as above

Applicant...... Hongli Zhihui Group Co.,Ltd. Guangzhou Branch.

Huadu District, Guangzhou, China

Standard ...... IEC TR 62778:2014

 Test sample(s) received......
 2022-09-01

 Test in period......
 2022-09-05

Procedure deviation ...... N.A.

Non-standard test method .....: N.A.

**Note:** The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

Type of test object ...... LED Package

Trademark ...... N.A.

Model/type reference ...... HL-EMC-3030D46W-2C-S1-HR3(R9)-XJ1

Multiple model...... N.A.

Manufacturer...... Hongli Zhihui Group Co.,Ltd. Guangzhou Branch.

Room 316, Building 2, No.1, Xianke Yi Road, Huadong Town,

Huadu District, Guangzhou, China

Rating ...... Input:6Vdc, 150mA

Copy of marking plate:

None





|  | Report No.: \$22220829-39247E-SF   |  |  |  |  |
|--|--|--|--|--|--|
| Test item particulars:   |  |  |  |  |  |
| Product evaluated:   | <ul><li>☑LED package</li><li>☐ LED module</li><li>☐ Lamp</li><li>☐ Luminaire</li></ul>       |  |  |  |  |
| Rated voltage (V):   | See rating   |  |  |  |  |
| Rated current (mA):  | See rating   |  |  |  |  |
| Rated Luminance (Mcd/m²):  | Not specified  |  |  |  |  |
| Component report data used:  | <ul><li>☑ Not applicable</li><li>☐ LED package</li><li>☐ LED module</li><li>☐ Lamp</li></ul> |  |  |  |  |
| Possible test case verdicts:   |  |  |  |  |  |
| -test case does not apply to the test objectN(.A.)   |  |  |  |  |  |
| -test object does meet the requirementP(ass)   |  |  |  |  |  |
| -test object does not meet the requirementF(ail)   |  |  |  |  |  |
| General remarks:   |  |  |  |  |  |
| The test results presented in this report relate only to the object tested.  This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.  "(See Enclosure #)" refers to additional information appended to the report.  "(See appended table)" refers to a table appended to the report.  Throughout this report a point is used as the decimal separator.  List of test equipment must be kept on file and available for review.  Remark:  Appendix A EUT photos |  |  |  |  |  |
| General product information:   |  |  |  |  |  |
| "EUT" as referred in this report is LED package.   |  |  |  |  |  |



Report No.: SZ2220829-39247E-SF

| IEC TR 62778 |                    |                 |         |  |  |
|--------------|--------------------|-----------------|---------|--|--|
| Clause       | Requirement + Test | Result - Remark | Verdict |  |  |


| 7   | MEASUREMENT INFORMATION FLOW   |                                |   |  |  |
|-----|--|--------------------------------|---|--|--|
| 7.1 | Basic flow   |                                | Р |  |  |
|     | 'Law of conservation of luminance' applied   |                                | Р |  |  |
|     | Use of only true luminance/radiance values   |                                | Р |  |  |
|     | In case of luminaire: The light source is operated in the luminaire under similar conditions as when tested as a component |                                | Р |  |  |
|     | In case E <sub>thr</sub> value for RG2 was established the peak value was derived from angular light distribution          |                                | N |  |  |
| 7.2 | Conditions for the radiance measurement  |                                |   |  |  |
|     | Standard condition applied (200mm distance, 0,011rad field of view)  |                                | Р |  |  |
|     | Non-standard condition applied   |                                | N |  |  |
| 7.3 | Special cases (I): Replacement by a lamp or LED module of another type   |                                |   |  |  |
|     | Light source is a white light source   |                                | N |  |  |
|     | Evaluation done based on highest luminance   |                                | N |  |  |
|     | Evaluation done based on CCT value   |                                | N |  |  |
| 7.4 | Special cases (II): Arrays and clusters of primary light sources   |                                |   |  |  |
|     | LED package is evaluated as:   | ☐RG0 unlimited ☐ RG1 unlimited | N |  |  |
|     | E <sub>thr</sub> of LED package applies to array   |                                | N |  |  |
| 8   | RISK GROUP CLASSIFICATION  |                                |   |  |  |
|     | Risk group achieved:   |                                | Р |  |  |
|     | Risk Group 0 unlimited   |                                | N |  |  |
|     | Risk Group 1 unlimited   |                                | N |  |  |
|     | - E <sub>thr</sub>   | RG1                            | Р |  |  |



Report No.: SZ2220829-39247E-SF

| Clause                       | Requirement + Test                    |                |                                      |                        | Result - Remark   |        |     |
|------------------------------|---------------------------------------|----------------|--------------------------------------|------------------------|---|--------|-----|
|                              | TABLE: Spectroradiometric measurement |                |                                      |                        |   |        |     |
|                              | Measurement performed on:             |                |                                      |                        |   |        | P — |
|                              |                                       |                |                                      |                        | ☐ LED module ☐ Lamp ☐ Luminaire HL-EMC-3030D46W-2C-S1-HR3(R9)-XJ1 |        |     |
|                              |                                       |                |                                      |                        |   |        |     |
|                              | Test voltage (V)                      |                |                                      | 6Vdc                   | ;   |        |     |
|                              | Test current (mA)                     |                |                                      | 150n                   | 150mA   |        |     |
|                              | Test frequency (Hz)                   |                |                                      |                        |   |        |     |
|                              |                                       |                |                                      |                        |   | _      |     |
|                              | Measurement distance ⊠ 20 cm ☐ cm     |                |                                      |                        |   |        | _   |
|                              |                                       |                |                                      |                        | ☐ Non-small:mm<br>☑ Small:1.6mm                                   |        | _   |
|                              | Field of view                         |                |                                      |                        |   |        | _   |
|                              | Item                                  | Symb<br>ol     | Units                                | Resu                   | ılt   | Remark |     |
| Correlated                   | colour temperature                    | ССТ            | K                                    | 6639                   |   |        |     |
| x/y colour coordinates       |                                       | x/y            |                                      | 0.3194/0.3330          |   |        |     |
| Blue light hazard radiance   |                                       | L <sub>B</sub> | W/(m <sup>2</sup> •sr <sup>1</sup> ) | 4.853x10 <sup>3</sup>  |   |        |     |
| Blue light hazard irradiance |                                       | E <sub>B</sub> | W/m <sup>2</sup>                     | 8.015x10 <sup>-1</sup> |   |        |     |
| Luminance                    |                                       | L              | cd/m <sup>2</sup>                    | 5.850x10 <sup>6</sup>  |   |        |     |
| Illuminance                  |                                       | Е              | lx                                   | 975                    |   |        |     |
| Supplemen                    | ntary information: NA                 | <u> </u>       |                                      |                        |   |        |     |




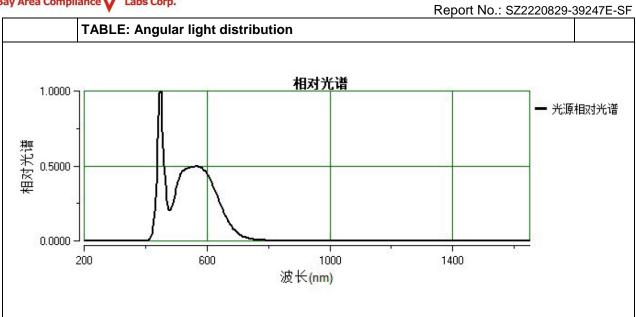



## **Appendix A - EUT Photos**

## Theoverall viewofEUT

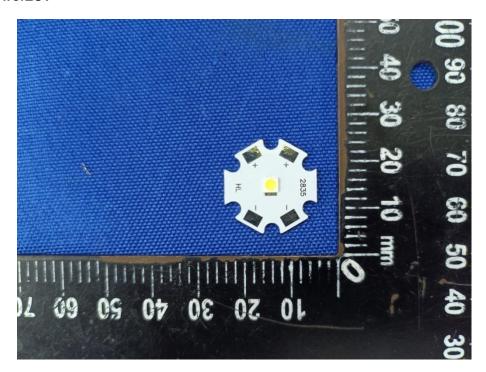



Report No.:SZ2220829-39247E-SF

## **Directions:**

- 1. The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.
- 2.Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
- 3.Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
- 4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
- 5. This report cannot be reproduced except in full, without prior written approval of the Company.
- 6. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

\*\*\* End of report \*\*\*